



SPECIFICATION

SEWER GASKETED WHITE SDR35

SEWER GASKETED PVC

Pacific Plastics gravity Sewer pipe is produced for use in non-pressure drainage of sewage and surface water. The compound is PVC 1120 Type 1 Grade 1, with cell class of 12454B per ASTM D1784.

Pacific Plastics produces its SDR35 series of pipe in strict compliance to ASTM D3034. This product is listed with IAPMO.

- For the integral bells, Reiber Gaskets are used that conform to ASTM F477.
- The joints shall conform to ASTM D3212.

Perforated pipe specification:

- 2 rows of holes, 120° apart, parallel to the axis of the pipe
- Holes are 1/2" in diameter and are on 5" center


Gasketed PVC Sewer pipe is produced in White color and in 20 foot lengths. Solid pipe is produced from 4" to 15" and perforated pipe is produced from 4" to 8"

DIMENSIONS

Size (inch)	OD (Outside Diameter)	T 200 PSI SDR21	B (Approx Bell Diameter)	C (Approx Bell Depth)	D (Insert Mark)
4	4.215	0.120	5.25	1.75	3.50
6	6.275	0.180	7.50	3.00	4.25
8	8.400	0.240	10.00	4.00	4.75
10	10.500	0.300	12.25	10.25	6.00
12	12.500	0.360	14.25	14.25	6.25
15	15.300	0.437	17.25	17.25	7.25

WEIGHTS

Size (inch)	LBS/100'
4	104.0
6	234.0
8	424.0
10	621.0
12	887.0
15	1320.0

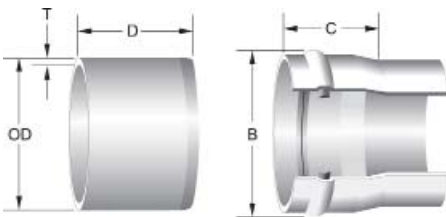

- Size** Inch
- OD** Outside Diameter
- T** Thickness
- B** Approx. Bell Diameter
- C** Approx. Bell Depth
- D** Insert Mark